
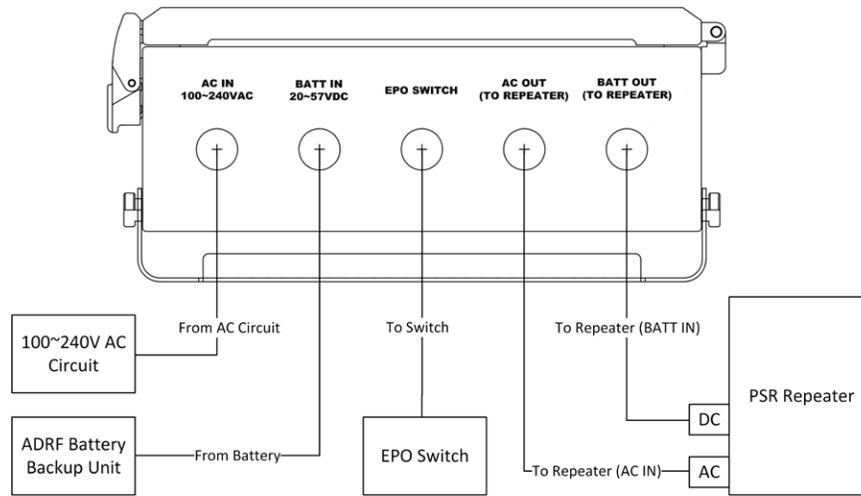


PSR-EPO-PKG-U

Emergency Power Off Switch

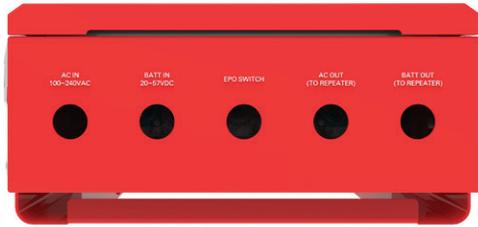

Electronic Specifications

Operating Condition	Voltage (BATT IN)	20 - 57 VDC
	Switch Control	Loop Off (200 kΩ min) Green LED On / Loop On (220 Ω max) Red LED On
	Current	20A (Max)
Power On/Off Capability	AC Voltage	240 VAC (rms) (Max)
	DC Voltage	1000 VDC (Max)
	Switching Time	30 ms (Max)
	Relay Durability	1,000,000 Operations (Min)
Supported Models	PSR-78-8527-PKG, PSR-78-9533-U, PSR-78-9537-U, PSR-VU-9537-U, PSR-U-9537-U, FiRe-78-8-U	

Mechanical Specifications

Dimension (W x H x D)	11.8 x 11.8 x 4.7 in (300.0 x 300.0 x 120.0 mm) (w/o mounting bracket)
Weight	25.3 lb (11.5 kg) (w/o mounting bracket)
Operating Temperature	-40°F - 185°F (-40°C - 85°C) (w/o icing or condensation)
Humidity	5 - 85%
Weather Resistance	IP 66

Web www.adrftech.com
 Tel +1 818.840.8131 Fax +1 818.840.8138
 Technical/Customer Support +1 800.313.9345
 3116 West Vanowen St. Burbank, CA 91505

